

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 498 082 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
06.05.1998 Bulletin 1998/19

(51) Int Cl.<sup>6</sup>: **G06F 3/033**

(21) Application number: **91200194.8**

(22) Date of filing: **01.02.1991**

### (54) Apparatus for the interactive handling of objects

Vorrichtung zur interaktiven Behandlung von Objekten

Dispositif de traitement interactif d'objets

(84) Designated Contracting States:  
**DE FR GB IT**

(43) Date of publication of application:  
12.08.1992 Bulletin 1992/33

(73) Proprietor: **Philips Electronics N.V.**  
**5621 BA Eindhoven (NL)**

#### (72) Inventors:

- Anderson, Lisa Chevanne  
NL-5656 AA Eindhoven (NL)
- Holman, Kathleen Louise  
NL-5656 AA Eindhoven (NL)
- Van Swaaij, Maurice Gerardus Bernardus  
Franciscus  
NL-5656 AA Eindhoven (NL)

(74) Representative: **Schouten, Marcus Maria et al**  
**INTERNATIONAAL OCTROOIBUREAU B.V.,**  
**Prof. Holstlaan 6**  
**5656 AA Eindhoven (NL)**

(56) References cited:  
**EP-A- 0 355 458** **FR-A- 2 587 815**  
**US-A- 4 451 895**

- Fourth USENIX Computer Graphics Workshop,  
8-9 October 1987, Cambridge, MA, USA page 103  
Don Hopkins: "Directional Selection is Easy as  
Pie Menus"

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 498 082 B1**

## Description

The invention relates to an apparatus for the interactive handling of objects, such as electronic documents and tools, as claimed in the preamble of claim 1. Such an apparatus is known from the article by Hopkins: "Directional Selection is Easy as Pie Menus" in a report of the Fourth USENIX Computer Graphics Workshop, 8-9 October 1987, Cambridge, MA, USA, page 103.

Such an apparatus or workstation is generally used for preparing, modifying and storing documents or sets of data in the form of electronic files kept in a dedicated or general purpose computer system. By entering commands to the input devices of the workstation documents are retrieved from a storage device, amended, copied, stored again in the storage device, etcetera. When the workstation is connected to other workstations by means of a local or public network, for example via telephone lines, documents can be transmitted to other workstations to be read by a person using the other workstation. For all these activities a number of tools are necessary to copy, transmit, store, etcetera the documents and sets of data. In the frame of the present application these tools, documents and the necessary supplemental executable programs and data are indicated with the general term objects. Documents are, for example, text documents, available as a string of characters, graphic documents available as a (compressed) bit map or a set of tabular or algorithmic data, voice documents in the form of digitized sound. A document may even take the form of an executable program. Relations between documents may exist and documents may comprise both text, graphic and sound data. Other kinds of objects are, for example, programs emulating a calculator, agenda, calendar and telephone directory or communication equipment, as a telephone or fax. In a workstation the objects are indicated on the screen much in the way objects are present on a desktop.

For the handling of the objects, selections have to be made. Both the selection of an object and the selection of an adjustment or an operation on the object. Such selections are commonly made by the display of a menu on which a number of available options is displayed, subsequently one of the options is selected by means of a pointer device such as dedicated keyboard buttons, a mouse or a stylus and digitizing tablet.

A menu is conventionally displayed in the form of vertical columns or horizontal rows of which the length is defined by the number of options. An example of such a menu is disclosed in GB-A 2 166 627. In choosing an option from such a menu the pointer device has to be moved over a path substantially corresponding to the horizontal or vertical lines along which the options are arranged. The human physiology is not well adapted to move a pointer device such as a mouse or a stylus along straight lines over predetermined paths and distances. This inconvenience may lead to frequent errors in se-

lection and make a carefully visual inspection necessary before giving a command to the workstation that the presently indicated option is the desired one.

It is, *inter alia*, an object of the invention to provide an apparatus according to the introductory paragraph whereby the menu of options is displayed and whereby movements on or by the pointer device are adapted to hand movements that a human operator can make and remember easily. An apparatus in accordance with the invention is therefore characterized in the features claimed in the characterizing portion of claim 1. While working with a pointer device such as a mouse or a stylus it is more easy to target area's along a curved line around a central area located somewhere beneath the hand of the operator on a desk than to follow substantially straight lines. Also travel of the pointer device from the centerpoint is reduced and it is easier to remember the position of each option by utilizing motor and spatial memory.

It is remarked that it is known *per se* from the article by Hopkins, to use a pie menu whereby choices are presented as sectors of a circle around the cursor position, so that the direction of the movement from the centre of the pie menu outwards corresponds to a choice. It is not known from said disclosure to adapt the curvature of the path of the pointing item to an easily performed movement of a hand-held pointer device.

An embodiment of the apparatus according to the invention is further characterized in that the apparatus is arranged for displaying the options in a substantially circular-, substantially elliptical- or kidney-shaped band. A distance of approximately 15 cm is about the maximum distance that can be reached by a hand-held pointer device without displacement of the hand of the operator. Distances from 3 to 10 cm can be easily reached without overstretching.

A preferred embodiment of the apparatus according to the invention is characterized in that the apparatus is arranged for displaying the options in a substantially circular-, substantially elliptical- or kidney-shaped band. Easy movement of a hand-held pointer device along a closed loop results in a roughly kidney shaped curve. As only part of the curve may be occupied with areas corresponding to presented options an elliptical or circular shaped band can be used instead. For symbolic and esthetical reasons the circular form may be preferred.

When only a portion of the curve is filled with options the preferred location for those options to be presented is the upper left part of the curve when the operator is right handed, and it is the upper right part when the operator is left handed. Switching from the one mode to the other can optionally be provided for in one and the same apparatus without much additional effort.

An embodiment of the apparatus according to the invention is further characterized in that the pointer device comprises a stylus and means for detecting the position of the same. A stylus provides an easily hand-held

pointer device with which fast and accurate movements can be made, resulting in a quick and accurate selection of a desired option or a plurality of desired options.

Another embodiment of the apparatus according to the invention is characterized in that the pointer device comprises a touch-sensitive pad arranged for detecting the position of an arbitrary object on a touch-sensitive surface. In this embodiment a finger or an object such as a conventional pencil can be used for selection of an area corresponding to a desired option. Also other devices such as a data tablet can be used for indicating a position.

A preferred embodiment of the apparatus according to the invention is characterized in that an option is selectable for performing an operation on a previously selected object and in that the apparatus is provided with means for requesting the selection of an object after an option is selected when no object has been previously selected. An operation on an object, selected by indicating the corresponding option from the menu, can only be performed when an object is selected as well. If such an object was not previously selected, the operator will be reminded of the fact and will be requested to select one of the available objects on which the operation can be performed. It is therefore not necessary for the operator to observe a certain chronological order in selecting options and operations to be applied to the objects.

While working with a document or while performing other activities it is normally undesirable to have part of the viewscreen permanently occupied by the menu. A preferred embodiment of the apparatus according to the invention is therefore characterized in that the pointer device is provided with first command means for display of the menu and second command means for selecting options from said displayed menu. The first and second command means may be integrated in one button or may be, for example, a button and a touch sensitive tip of a stylus. The first and second command means may be different buttons of the pointer device, or may even be parts of an input peripheral of the apparatus without a direct physical connection to the pointer device, such as a keyboard.

An embodiment of the apparatus according to the invention is characterized in that command means are provided for display of the menu of options at a location on the viewscreen which corresponds to a position selectable by the pointer device. By first moving the pointer device to a specific area and subsequently activating the first command means the portion of the viewscreen that will be covered by the menu can be chosen by the operator. The menu can be removed from the screen by various means, such as selecting a specific "remove menu" option, activating the first command means again, or by selecting an option which implies that the menu is to be removed in addition to the selection of a designated function or object.

An embodiment of the apparatus according to the invention is further characterized in that the apparatus

comprises further display means for displaying on the viewscreen at least one sub-menu of options along a further curved band and in that the apparatus comprises means for providing further corresponding areas positioned in a further corresponding band which is curved similar to the further curved band. Selection of a first option often makes it necessary or desirable to select sub-options. In an embodiment of the invention the sub-menu may already be made visible when the pointer device is positioned at the corresponding area for the first option, but before a selection command is given. This provides a better visual impression of what option is going to be selected. It also allows to select directly a sub-option and via the sub-option the first option, thereby making the explicit selection of the first option superfluous.

A preferred embodiment of the apparatus according to the invention is characterized in that it is adjustable to different working statuses and in that it is arranged for presenting on the menu a first set of options which are independent of the working status and a second set of options which are adjusted to a current working status. Options that are permanently available will be always displayed at the same locations in the presented menu. Options that have a meaning in a certain working status only are displayed exclusively when the apparatus is in that status.

A further embodiment of the apparatus according to the invention is characterized in that it is arranged for establishing corresponding areas associated with options in the menu before displaying the options on the viewscreen, and in that an option is selectable prior to display of that option on the viewscreen. It may occur that the operator is experienced and knows beforehand where to move the pointer device when the menu is activated without having to wait for the menu to appear completely on the viewscreen. In that case the selection is correctly performed. In an embodiment the display of the complete menu may be interrupted or skipped.

These and other, more detailed aspects of the invention will be described, by way of example, with reference to the accompanying drawings.

In the drawings shows

Figure 1 a workstation comprising a viewscreen and several input devices;

Figures 2a and 2b the reach of an operators hand while holding a pointer device such as a stylus, the full circle not being in accordance with the invention as claimed,

Figure 3 a first embodiment of a menu whereby the options are aligned along a curved band, the nearly 180° not being in accordance with the invention as claimed;

Figures 4a, 4b elliptical and kidney shaped bands of which a portion is occupied by a number of options;

Figures 5a and 5b an impression of an image pro-

jected on the viewscreen with the menu displayed at different positions, the full circle not being in accordance with the invention as claimed;  
 Figure 6 in detail a stylus for use as a pointer device;  
 Figure 7 a displayed menu with various sub-menu's depending on the position of the pointer device, the full circle not being in accordance with the invention as claimed;  
 Figure 8 a partially displayed menu when a rapid selection is made.

In Figure 1 a workstation 10 is shown. This station comprises a viewscreen 11, for example a CRT or flat panel-screen together with the necessary electronics circuitry and other components for display on the screen of text and graphical information. A keyboard 12 is provided for entering text data and various commands into the workstation. Additional input devices are shown, a mouse 13, a stylus 14 with digitizing tablet 15 and a touch sensitive pad 16. A touch sensitive pad and the viewscreen can possibly be integrated to form a touch sensitive screen. Of the additional input devices no more than one is necessary in a workstation according to the invention. The workstation may comprise further devices, not shown in the Figure, such as a document scanner, a printer, a telephone etcetera. The devices are connected to steering and control hardware, and to a power supply, both of which are housed in a cabinet 17. The cabinet may comprise also a local storage unit in the form of a magnetic or solid state memory. The workstation may be connected via a link 18 to a computer for storage and transmission of data and/or may be connected directly or via the computer to a network to be able to communicate with other workstations. Such link may comprise wires or be partially wireless.

For the handling of documents and other objects available to the operator commands are to be given to the workstation via one of the input devices. A menu of commands may be displayed on the screen with options which can be chosen from by moving a cursor to the desired option by a corresponding movement of the mouse 13 or stylus 14, or by the movement of a finger or arbitrary object across the touch sensitive pad 16.

The options are presented on the screen as lying on a curved band. This band is adapted such that the options can easily be reached from a hand without lifting the wrist from the desktop. In the Figures two positions of a hand 20 are shown while reaching at points 22a and 22b on a circle 22. The positions of the areas to be pointed at should be in a band within this circle and following a portion of its circumference.

Figure 3 shows a possible menu for display on the viewscreen. The menu 30 is displayed as a disc with a number of options. In the menu three types of options can be distinguished. A first portion, the shaded outer band 31, contains a number of main options 31a, 31b, 31c, ..., 31h for the present working status. The options are mainly presented by icons. Shown are, as an exam-

ple, an icon (31c) for drawing lines; for entering text (31d), for sending a document (31g) or for making a phonecall (31h). A second portion 32 of the disc menu shows a number of sub-options, associated with the presently highlighted main option 31c. The presented sub-menu allows the operator to choose a line type and colour. The third portion 33 of the menu, which is adaptable to a certain working status, allows the user to choose a specific operation to be performed on the object that is handled presently. According to the invention claimed, the angle between the ends of the menu is substantially less than 180 degrees.

Figures 4a and 4b show alternative shapes of the menu. Figure 4a shows a kidney shaped menu 34 of which the main options are arranged in an outer band 35 in the upper right hand portion of the menu. These positions are optimized for a left handed operator. Figure 4b shows an elliptical shaped menu 36 with the main options in a band 37 in the upper left hand side, i.e. optimized for a right-handed operator.

Each of the three shapes shown, or any other suitable shape, can be taken at will within the context of the present invention. In Figure 4b a central point C for the curvature of the relevant portion of the band 37 is indicated. The radius of curvature D of the band 37 around the centerpoint C will be typically less than 15 cm, and preferably between 3 and 10 cm. The dimensions are determined by the size of the human hand and refer to the positions of the areas to be pointed at with the pointer device, not directly to the size of the menu on the viewscreen.

For most activities performed with a work station more than one selections have to be made. For example when a document has to be copied, printed or opened for further editing, both the document and an operation have to be selected. For communicating to another workstation, a document, an address or identification number and a way of transport have to be selected. In a workstation according to the present invention no predetermined chronological order for making these selections is to be followed. When print or open is selected the tool will operate on the document that was preselected before. If no document was preselected a request to the operator is presented for selecting one of documents available for this particular operation, including of course the possibility to open a new document. The request may be presented in the form of a menu with all available documents.

If an option for establishing a communication link is selected, for example a telephone line, also a source of information to be transmitted has to be known to the system and the destination. If both source and/or destination are unknown a menu will be presented containing the possible sources and/or the possible destinations taking into account the available ones in the present working status.

Figures 5a and 5b show images of the picture visible on a viewscreen of an apparatus. The screen 50

shows two documents 51 and 52, together with a disc menu 53 which contains options that can be selected for performing operations on the document. Either document may be a text document, a graphic document or a voice document for example represented as many small bars or other symbols which indicate volume and/or pitch of the sound. The screen further shows many other things that are to be used, such as a garbage bin, a calculator, or icon indicating a phone directory, etcetera. In order to be sure that the menu does not eclipse a part of the screen with information that should remain visible, the position of a cursor 54, associated to the position of the pointing device, is taken as centerpoint of the displayed disc menu. Figures 5a and 5b show the menu at different places on the screen. In determining the position of the menu from the position of the cursor care has to be taken that the whole menu is on the screen, even if the cursor is very close to the edge. In such a case the control section of the apparatus will not take the cursor position as the centerpoint of the disk menu. According to the invention claimed, the angle between the end points of the menu is substantially less than 180°.

Figure 6 shows a stylus, designed for use with an apparatus according to the present invention. The stylus 60 comprises two buttons, a first button 61 at the side, a few cm from the tip. This button is located such that the index or thumb of the operator will rest on it. The second button 62, for example a microswitch, is located in the tip and is activated by pressing the stylus on a surface. The position of the stylus can be detected by a digitizing tablet 63 and the activation of the buttons is communicated, to the control section, for example wirelessly by electromagnetic or ultrasonic signals.

Several modes of selecting one or more options from a menu are possible. In a first mode the menu is displayed when and as long as the first button 61 is activated. Hovering above the desired option will highlight it, and it is actually selected when the first button 61 is released. The menu is removed from the screen at the same time. In a second mode of operation the menu is also displayed when and as long as the first button 61 is activated. Hovering with the stylus will highlight an option. Pressing the second button 62 will select the command to be performed corresponding to the highlighted option, more than one command can be performed, by subsequently pressing button 62 at several options. A third mode of operation uses button 61 to display the menu on the screen, options are chosen by pressing button 62. The menu is removed by a special "hide menu" option.

A two button stylus has an advantage over a single button stylus in that the second button can also be used when the menu is not appearing on the screen for example for "writing" on a displayed document.

A menu 70 with several sub-menu's is shown in Figures 7a and 7b. In Figure 7a the highlighted main option 71 is for specifying or editing text, and a set of sub-op-

tions is shown. The sub-options include type faces and sizes and the colour or shade of the characters and their background. Further options include the selection, copy or insertion of portions of text, or to reverse the last action taken. In Figure 7b a different set of sub-options is shown, which are associated with another main option, shown is a main option 72 and the selected sub-option 73 is "establish a connection with another workstation". According to the invention as claimed, the menu has two end points and the angle between them is substantially less than 180°.

In Figures 8 an additional feature of the apparatus according to the invention is illustrated. As the organization of the menu allows a fast reaction of the operator to the options available in the menu with few errors, it may occur that the operator becomes experienced and knows beforehand where to move the pointer device when the menu is activated without waiting for the display of the menu to appear completely on the viewscreen. According to the invention the apparatus is arranged to associate firstly area's relative to the position of the pointer device at the moment the menu is activated to the various options and only later to present the options on the viewscreen. A movement of the pointer device to one of the corresponding areas and starting the selection procedure will result in the option being selected before the menu is fully displayed on the screen. When selection of an option implies removal of the menu from the screen the menu will disappear before it is completely displayed. Depending on the implementation of the display procedure for the menu, it may occur that the menu will not appear at all on the screen when such rapid selection is made.

In Figure 8 a menu 80 in the process of being displayed is shown. A curved band 81 is shown around a central point C, the latter corresponding to the position indicated by the pointer device at the moment the menu is activated. The position of two options 81a and 81b, are already displayed on the screen. Further options 81c till 81h are to be displayed but not yet present inside the band 81, the position of these options is indicated in the figure by dashed lines. Immediately after the operator has activated the menu he moves the pointer device to a point D within the corresponding area of option 81f for selecting that option. From previous experience he knows that the option he intends to select will appear at this location 81f. The apparatus now allows to select the option before actual display of the corresponding icon at location 81f takes place.

#### Claims

1. Apparatus for the interactive handling of objects, such as electronic documents and tools, which apparatus comprises

- a viewscreen for displaying thereon a menu of

- a plurality of options in a first curved band, and a pointer device for pointing at a corresponding area from a like plurality of corresponding areas positioned in a second curved band corresponding to the first curved band, each area being associated with one of the options displayed on the viewscreen, wherein the pointing is effected through manipulating by a user of a pointing item and enables selecting a pointed one of the options,

characterized in that the second curved band is ergonomically accommodated to rotary wrist movement of a hand of the user person with wrist substantially stationary on said pointer device, said movement being substantially less than 180 degrees from end to end, and said second curved band being centred around the wrist position.

2. Apparatus according to Claim 1, characterized in that the average radius of curvature of the corresponding band is no more than approximately 15 cm, and preferably is between approximately 3 and 10 cm.
3. Apparatus according to Claim 1 or 2, characterized in that the apparatus is arranged for displaying the options in a substantially circular-, substantially elliptical- or kidney-shaped band.
4. Apparatus according to Claim 3, characterized in that the displayed options are presented mainly in the upper left hand portion of the curved band, or mainly in the upper right hand portion.
5. Apparatus according to Claim 1, 2, 3 or 4, characterized in that the pointer device comprises a stylus and means for detecting the position of the same.
6. Apparatus according to Claim 1, 2, 3 or 4, characterized in that the pointer device comprises a touch-sensitive pad arranged for detecting the position of an arbitrary object on a touch-sensitive surface.
7. Apparatus according to Claim 1, 2, 3 or 4, characterized in that the pointer device comprises a data-tablet.
8. Apparatus according to any one of the preceding Claims, characterized in that an option is selectable for performing an operation on a previously selected object and in that the apparatus is provided with means for requesting the selection of an object after an option is selected when no object has been previously selected.
9. Apparatus according to any one of the preceding Claims, characterized in that the pointer device is

provided with first command means for display of the menu and second command means for selecting options from said displayed menu.

10. Apparatus according to any one of the preceding Claims, characterized in that command means are provided for display of the menu of options at a location on the viewscreen which corresponds to a position selectable by the pointer device.
11. Apparatus according to any one of the preceding Claims, characterized in that the apparatus comprises further display means for displaying on the viewscreen at least one sub-menu of options along a further curved band and in that the apparatus comprises means for providing further corresponding areas positioned in a further corresponding band which is curved similar to the further curved band.
12. Apparatus according to any one of the preceding Claims, characterized in that it is adjustable to different working statuses and in that it is arranged for presenting on the menu a first set of options which are independent of the working status and a second set of options which are adjusted to a current working status.
13. Apparatus according to any one of the preceding Claims, characterized in that it is arranged for establishing corresponding areas associated with options in the menu before displaying the options on the viewscreen, and in that an option is selectable prior to display of that option on the viewscreen.
14. Apparatus according to Claim 13, characterized in that it is arranged for interrupting display of the menu when an option is selected.

#### Patentansprüche

1. Gerät zur interaktiven Behandlung von Objekten, wie z.B. elektronische Dokumente und Werkzeuge, wobei das Gerät umfaßt
  - einen Bildschirm, um darauf ein Menü einer Vielzahl von Wahlmöglichkeiten in einem ersten gekrümmten Streifen wiederzugeben und
  - eine Zeigereinrichtung, um auf ein entsprechendes Gebiet aus einer ähnlichen Vielzahl von entsprechenden Gebieten zu zeigen, die in einem zweiten gekrümmten Streifen positioniert sind, der dem ersten gekrümmten Streifen entspricht, wobei jedes Gebiet mit einer der auf dem Bildschirm wiedergegebenen Wahlmöglichkeiten zusammenhängt, worin das Zeigen bewirkt wird, indem ein anzeigendes Element

- von einem Benutzer manipuliert wird und das Auswählen einer angezeigten Wahlmöglichkeit ermöglicht, dadurch gekennzeichnet, daß der zweite gekrümmte Streifen ergonomisch in bezug auf eine drehende Handgelenkbewegung einer Hand der Bedienperson angeordnet ist, bei nahezu stillstehendem Gelenk auf der genannten Zeigereinrichtung, wobei die genannte Bewegung im wesentlichen weniger als 180 Grad von einem zum anderen Ende beträgt und der genannte zweite Streifen um die Gelenkposition herum zentriert ist.
2. Gerät nach Anspruch 1, dadurch gekennzeichnet, daß der mittlere Krümmungsradius des entsprechenden Streifens nicht größer als ungefähr 15 cm ist und vorzugsweise zwischen ungefähr 3 und 10 cm liegt.
  3. Gerät nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß das Gerät ausgebildet ist, um die Wahlmöglichkeiten in einem im wesentlichen kreisförmigen, im wesentlichen ellipsenförmigen oder nierenförmigen Streifen wiederzugeben.
  4. Gerät nach Anspruch 3, dadurch gekennzeichnet, daß die wiedergegebenen Wahlmöglichkeiten hauptsächlich im oberen linken Abschnitt des gekrümmten Streifens oder hauptsächlich im oberen rechten Abschnitt dargestellt sind.
  5. Gerät nach Anspruch 1, 2, 3 oder 4, dadurch gekennzeichnet, daß die Zeigereinrichtung eine Schreibnadel umfaßt und Mittel zum Detektieren der Position desselben.
  6. Gerät nach Anspruch 1, 2, 3 oder 4, dadurch gekennzeichnet, daß die Zeigereinrichtung ein Sensorfeld umfaßt, das zum Detektieren der Position eines willkürlichen Objektes auf einer berührungsempfindlichen Oberfläche angeordnet ist.
  7. Gerät nach Anspruch 1, 2, 3 oder 4, dadurch gekennzeichnet, daß die Zeigereinrichtung ein Datentablett umfaßt.
  8. Gerät nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß eine Wahlmöglichkeit auswählbar ist, um eine Handlung an einem zuvor selektierten Objekt auszuführen und daß das Gerät mit Mitteln versehen ist, um die Selektion eines Objektes anzufordern, nachdem eine Wahlmöglichkeit ausgewählt worden ist, wenn zuvor kein Objekt selektiert worden ist.
  9. Gerät nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Zeigereinrichtung mit ersten Kommandomitteln zur Wiedergabe

des Menüs und zweiten Kommandomitteln zur Auswahl von Wahlmöglichkeiten aus dem genannten wiedergegebenen Menü versehen ist.

10. Gerät nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß Kommandomittel vorgesehen sind, um das Menü von Wahlmöglichkeiten an einer Stelle auf dem Bildschirm wiederzugeben, die mit einer von der Zeigereinrichtung selektierbaren Position übereinstimmt.
11. Gerät nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß das Gerät weitere Wiedergabemittel umfaßt, um auf dem Bildschirm zumindest ein Submenü von Wahlmöglichkeiten entlang einem weiteren gekrümmten Streifen wiederzugeben, und daß das Gerät Mittel umfaßt, um weitere entsprechende Gebiete vorzusehen, die in einem weiteren entsprechenden Streifen positioniert sind, der in ähnlicher Weise gekrümmt ist wie der weitere gekrümmte Streifen.
12. Gerät nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß es auf verschiedene Betriebszustände einstellbar ist und daß es ausgebildet ist, um auf dem Menü eine erste Menge von Wahlmöglichkeiten darzustellen, die vom Betriebszustand unabhängig sind, und eine zweite Menge von Wahlmöglichkeiten, die auf einen aktuellen Betriebszustand eingestellt sind.
13. Gerät nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß es zum Erstellen entsprechender mit Wahlmöglichkeiten in dem Menü zusammenhängender Gebiete ausgebildet ist, bevor die Wahlmöglichkeiten auf dem Bildschirm wiedergegeben werden, und daß eine Wahlmöglichkeit selektierbar ist, bevor diese Wahlmöglichkeit auf dem Bildschirm wiedergegeben wird.
14. Gerät nach Anspruch 13, dadurch gekennzeichnet, daß es ausgebildet ist, die Wiedergabe des Menüs zu unterbrechen, wenn eine Wahlmöglichkeit selektiert worden ist.

#### Revendications

1. Dispositif de traitement interactif d'objets tels que des documents et outils électroniques, lequel dispositif comprend
  - un écran pour afficher un menu contenant une pluralité d'options dans une première bande courbe, et
  - un dispositif de pointage pour pointer une zone correspondante dans une pluralité identique de zones correspondantes positionnées dans une

deuxième bande courbe correspondant à la première bande courbe, chaque zone étant associée à l'une des options affichées à l'écran, dans lequel le pointage est effectué via la manipulation, par un utilisateur, d'un dispositif de pointage et permet de sélectionner l'une des options,

caractérisé en ce que la deuxième bande courbe est ergonomiquement adaptée aux mouvements rotatifs du poignet d'une main de l'utilisateur, le poignet restant pratiquement stationnaire sur ledit dispositif de pointage, ledit mouvement étant nettement inférieur à 180 degrés d'une extrémité à l'autre et ladite deuxième bande courbe étant centrée autour de la position du poignet.

2. Dispositif suivant la revendication 1, caractérisé en ce que le rayon de courbure moyen de la bande correspondante ne dépasse pas 15 cm environ et se situe de préférence entre 3 et 10 cm environ.
3. Dispositif suivant la revendication 1 ou 2, caractérisé en ce que le dispositif est conçu pour afficher les options dans une bande de forme pratiquement circulaire, pratiquement elliptique ou réniforme.
4. Dispositif suivant la revendication 3, caractérisé en ce que les options affichées sont présentées principalement dans la partie supérieure gauche de la bande courbe ou principalement dans la partie supérieure droite.
5. Dispositif suivant la revendication 1, 2, 3 ou 4, caractérisé en ce que le dispositif de pointage comprend un stylet et des moyens pour détecter la position de ce dernier.
6. Dispositif suivant la revendication 1, 2, 3 ou 4, caractérisé en ce que le dispositif de pointage comprend un pavé tactile conçu pour détecter la position d'un objet arbitraire sur une surface tactile.
7. Dispositif suivant la revendication 1, 2, 3 ou 4, caractérisé en ce que le dispositif de pointage comprend une table à numériser.
8. Dispositif suivant l'une quelconque des revendications précédentes, caractérisé en ce qu'une option est sélectionnable pour exécuter une opération sur un objet préalablement sélectionné et en ce que le dispositif est pourvu de moyens permettant de demander la sélection d'un objet après qu'une option a été sélectionnée quand aucun objet n'a été préalablement sélectionné.
9. Dispositif suivant l'une quelconque des revendications précédentes, caractérisé en ce que le dispo-

sitif de pointage est pourvu d'un premier moyen de commande pour afficher le menu et d'un deuxième moyen de commande pour sélectionner des options dudit menu affiché.

10. Dispositif suivant l'une quelconque des revendications précédentes, caractérisé en ce que des moyens de commande sont prévus pour afficher le menu d'options à un endroit de l'écran correspondant à une option sélectionnable par le dispositif de pointage.
11. Dispositif suivant l'une quelconque des revendications précédentes, caractérisé en ce que le dispositif comprend d'autres moyens d'affichage pour afficher à l'écran au moins un sous-menu d'options le long d'une autre bande courbe et en ce que le dispositif comprend des moyens pour fournir d'autres zones correspondantes positionnées dans une autre bande correspondante qui est courbée de manière similaire à l'autre bande courbe.
12. Dispositif suivant l'une quelconque des revendications précédentes, caractérisé en ce qu'il peut être ajusté à différents états de travail et en ce qu'il est agencé pour présenter dans le menu une première série d'options indépendantes de l'état de travail et une deuxième série d'options adaptées à un état de travail en cours.
13. Dispositif suivant l'une quelconque des revendications précédentes, caractérisé en ce qu'il est agencé pour établir des zones correspondantes associées à des options du menu avant d'afficher les options à l'écran, et en ce qu'une option peut être sélectionnée avant d'être affichée à l'écran.
14. Dispositif suivant la revendication 13, caractérisé en ce qu'il est conçu pour interrompre l'affichage du menu lorsqu'une option est sélectionnée.



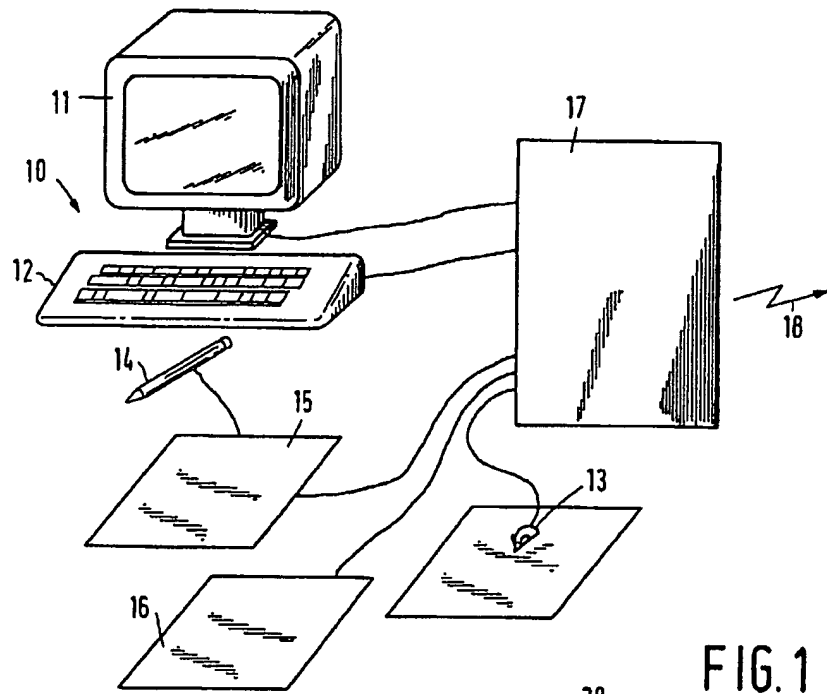


FIG. 1

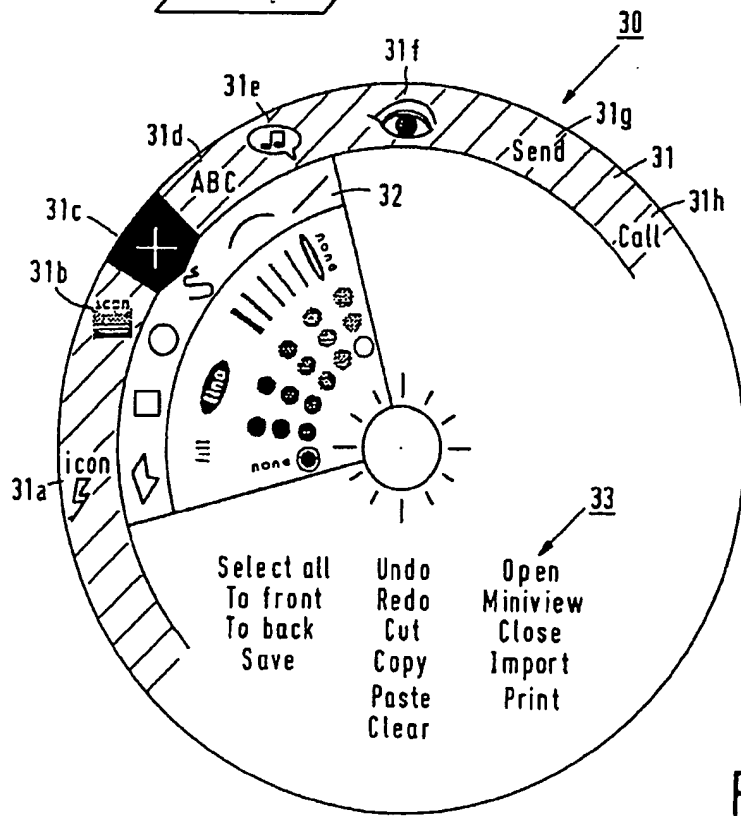


FIG. 3

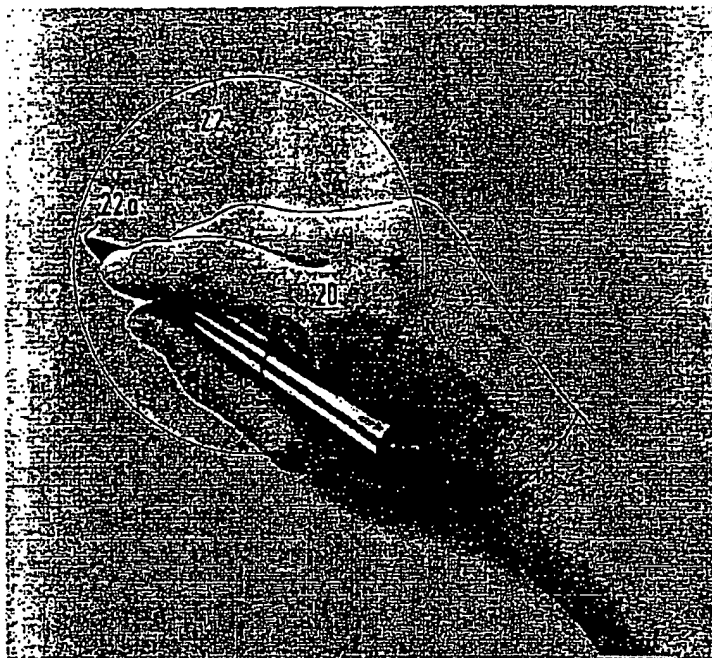


FIG. 2a

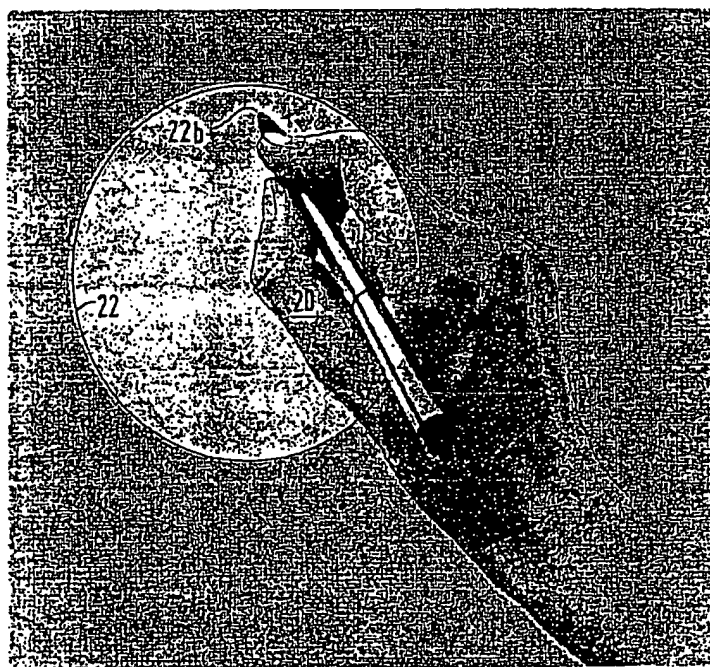


FIG. 2b

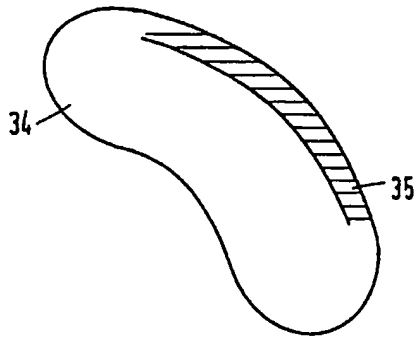


FIG. 4a




FIG. 4b

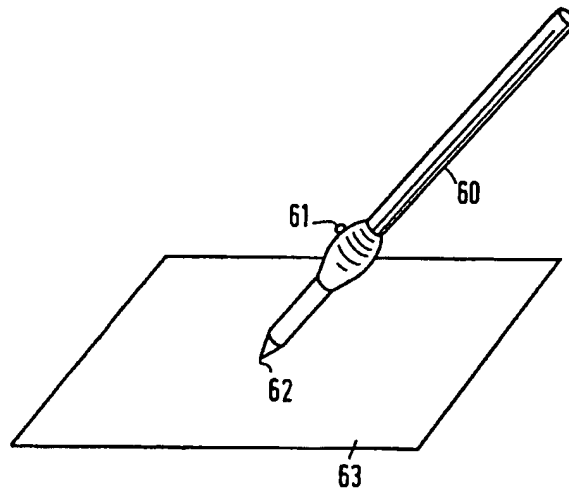


FIG. 6

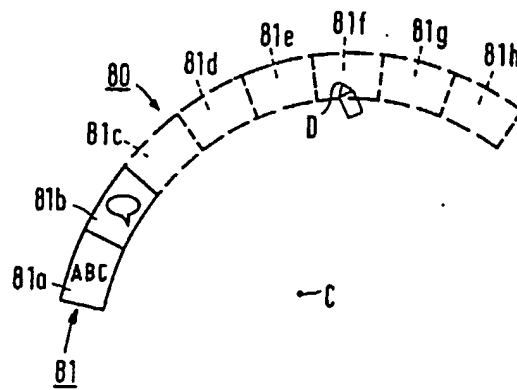


FIG. 8

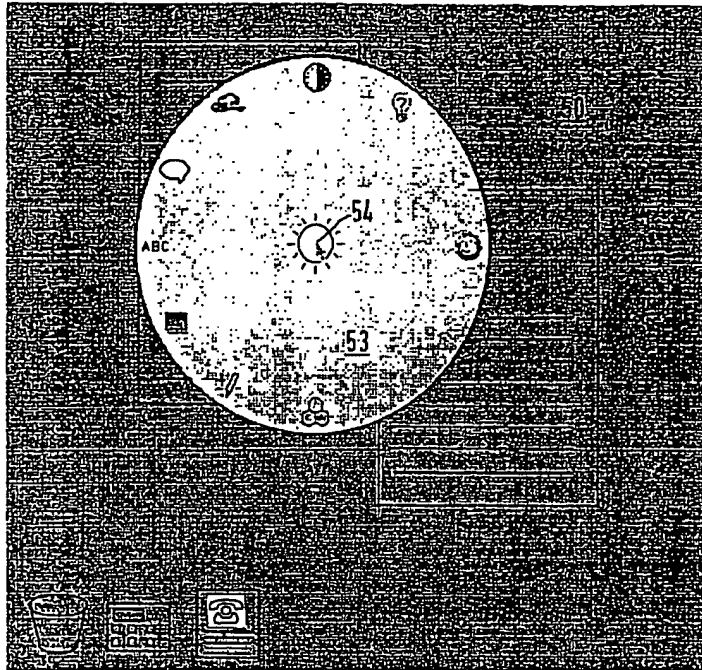


FIG. 5a

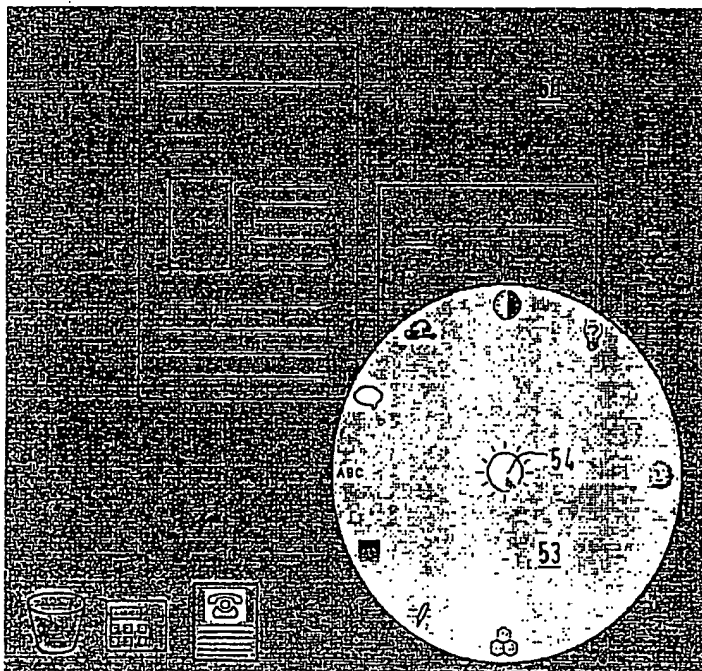


FIG. 5b

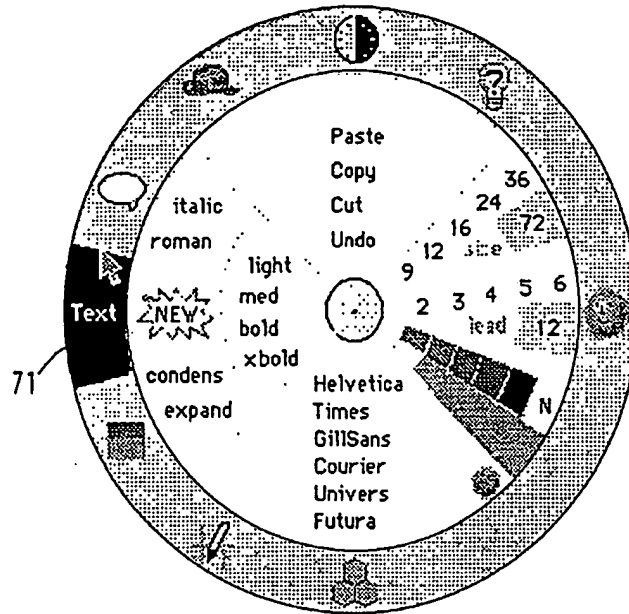


FIG. 7a

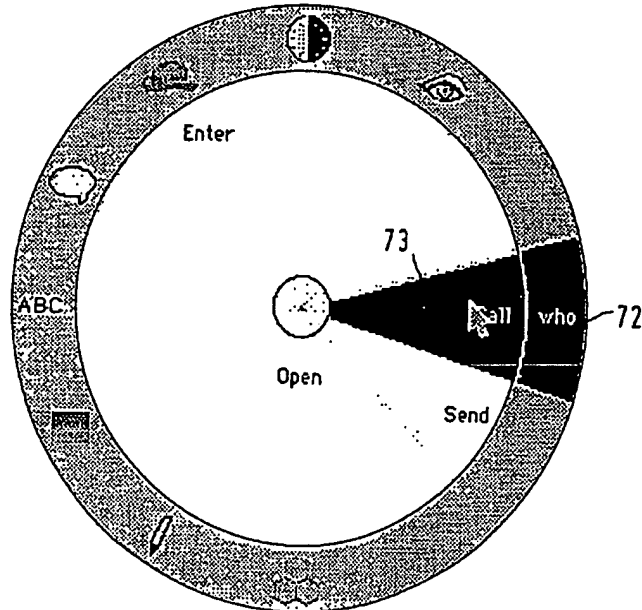


FIG. 7b

パテントファミリーリスト

3 application(s) for: JP5204344 (A)

**1 MULTIPLE ACTION ICON**

発明者: BECKER CRAIG H [US]; PICKOVER  
CLIFFORD A [US] (+1)

EC: G06F3/048A1H; G06F3/048A2

公報情報: CA2069118 (A1) — 1993-03-17

出願人 IBM [US]

IPC: G06F3/14; G06F3/023; G06F3/033; (+9)

**2 Multiple action icon.**

発明者: BECKER CRAIG HENRY [US];  
PICKOVER CLIFFORD ALAN [US] (+1)

EC: G06F3/048A1H; G06F3/048A2

公報情報: EP0533424 (A1) — 1993-03-24

出願人 IBM [US]

IPC: G06F3/14; G06F3/023; G06F3/033; (+9)

**3 MULTIPLE ACTION ICON**

発明者: KUREIGU HENRII BETSUKAA;  
KURIFUODOO ARAN PITSUKOBUAA (+1)

EC: G06F3/048A1H; G06F3/048A2

公報情報: JP5204344 (A) — 1993-08-13

出願人 IBM

IPC: G06F3/14; G06F3/023; G06F3/033; (+9)

---

esp@cenet データベースから供給されたデータ — Worldwide